


呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
100	75	0.6	10	10	150	60	60
125	75	0.6	10	10	200	60	60
	100	0.6	10	10	150	60	60
150	75	0.6	10	10	250	60	60
	100	0.6	10	10	200	60	60
	125	0.6	10	10	150	60	60
175	75	0.6	10	10	300	60	60
	100	0.6	10	10	250	60	60
	125	0.6	10	10	200	60	60
	150	0.6	10	10	150	60	60
200	75	0.6	10	10	350	60	60
	100	0.6	10	10	300	60	60
	125	0.6	10	10	250	60	60
	150	0.6	10	10	200	60	60
	175	0.6	10	10	150	60	60
225	75	0.6	10	10	400	60	60
	100	0.6	10	10	350	60	60
	125	0.6	10	10	300	60	60
	150	0.6	10	10	250	60	60
	175	0.6	10	10	200	60	60
	200	0.6	10	10	150	60	60
250	100	0.6	10	10	400	60	60
	125	0.6	10	10	350	60	60
	150	0.6	10	10	300	60	60
	175	0.6	10	10	250	60	60
	200	0.6	10	10	200	60	60
	225	0.6	10	10	150	60	60
275	100	0.6	10	10	450	60	60
	125	0.6	10	10	400	60	60
	150	0.6	10	10	350	60	60
	175	0.6	10	10	300	60	60
	200	0.6	10	10	250	60	60
	225	0.6	10	10	200	60	60
300	100	0.6	10	10	500	60	60
	125	0.6	10	10	450	60	60
	150	0.6	10	10	400	60	60
	175	0.6	10	10	350	60	60

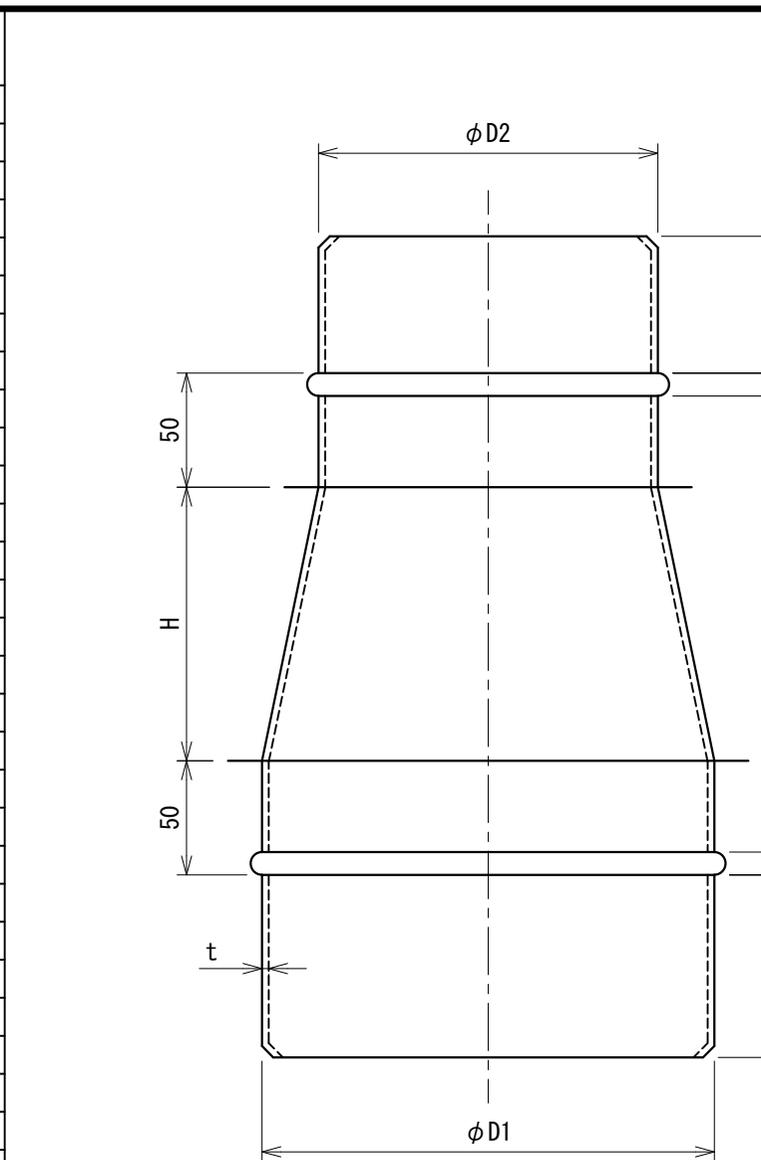

呼び径 D	外径公差	長さ公差 (b, L, ℓ)
φ75~φ700	-1.2~-1.9	0~+1
φ750~φ1000	-2.0~-2.2	0~+1

単位 : mm


呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
300	175	0.6	10	10	350	60	60
	200	0.6	10	10	300	60	60
	225	0.6	10	10	250	60	60
	250	0.6	10	10	200	60	60
	275	0.6	10	10	150	60	60

△		
△		
△		
記号	年月日	備考

品名	R管 (レジューサー)			
型式	R_FK_ENB_φ100~φ300			
材質	溶融亜鉛めっき鋼板・SGCC Z18 JIS3302 (塩ビ塗装)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 2. 27
			更新日附	
株式会社 フカガワ				

呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
325	125	0.8	13	10	500	60	60
	150	0.8	13	10	450	60	60
	175	0.8	13	10	400	60	60
	200	0.8	13	10	350	60	60
	225	0.8	13	10	300	60	60
	250	0.8	13	10	250	60	60
	275	0.8	13	10	200	60	60
	300	0.8	13	10	150	60	60
350	150	0.8	13	10	500	60	60
	175	0.8	13	10	450	60	60
	200	0.8	13	10	400	60	60
	225	0.8	13	10	350	60	60
	250	0.8	13	10	300	60	60
	275	0.8	13	10	250	60	60
	300	0.8	13	10	200	60	60
	325	0.8	13	13	150	60	60
375	175	0.8	13	10	500	60	60
	200	0.8	13	10	450	60	60
	225	0.8	13	10	400	60	60
	250	0.8	13	10	350	60	60
	275	0.8	13	10	300	60	60
	300	0.8	13	10	250	60	60
	325	0.8	13	13	200	60	60
	350	0.8	13	13	150	60	60
400	200	0.8	13	10	500	60	60
	225	0.8	13	10	450	60	60
	250	0.8	13	10	400	60	60
	275	0.8	13	10	350	60	60
	300	0.8	13	10	300	60	60
	325	0.8	13	13	250	60	60
	350	0.8	13	13	200	60	60
	375	0.8	13	13	150	60	60

単位：mm

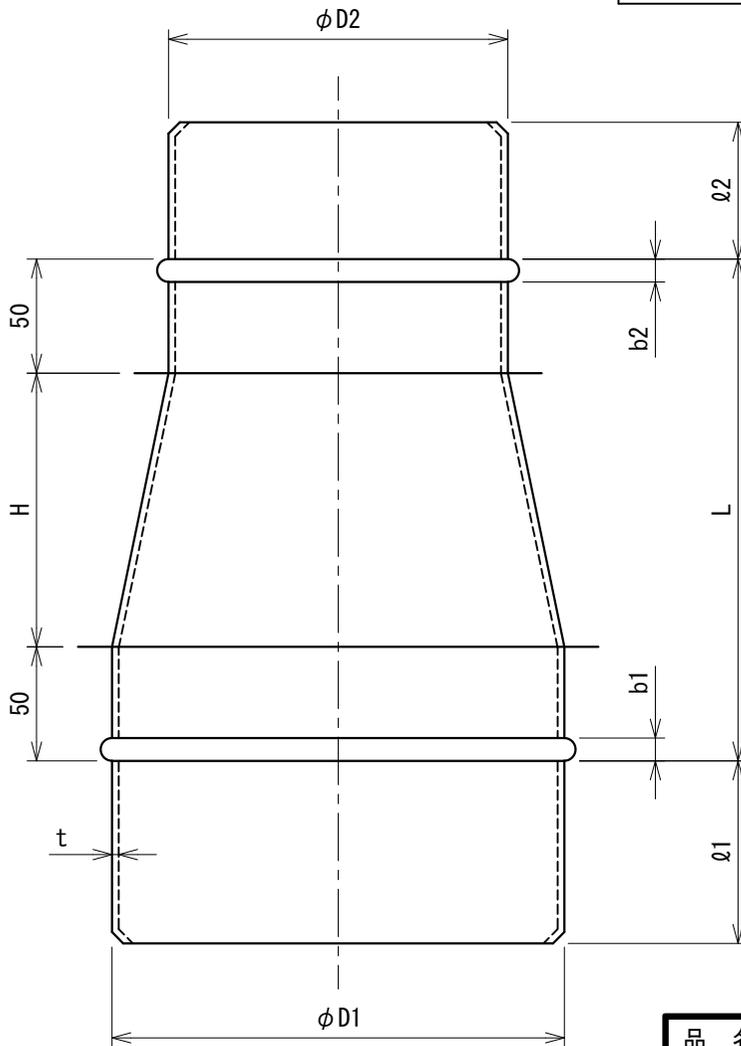

呼び径 D	外径公差	長さ公差 (b, L, ℓ)
φ75~φ700	-1.2~-1.9	0~+1
φ750~φ1000	-2.0~-2.2	0~+1


品名	R管 (レジャーサー)			
型式	R_FK_ENB_φ325~φ400			
材質	熔融亜鉛めっき鋼板・SGCC Z18 JIS3302 (塩ビ塗装)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 2. 27
			更新日附	

③		
②		
①	.	.
記号	年月日	備考

株式会社フカガワ

呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
425	225	0.8	13	10	500	60	60
	250	0.8	13	10	450	60	60
	275	0.8	13	10	400	60	60
	300	0.8	13	10	350	60	60
	325	0.8	13	13	300	60	60
	350	0.8	13	13	250	60	60
	375	0.8	13	13	200	60	60
	400	0.8	13	13	150	60	60
450	250	0.8	13	10	500	60	60
	275	0.8	13	10	450	60	60
	300	0.8	13	10	400	60	60
	325	0.8	13	13	350	60	60
	350	0.8	13	13	300	60	60
	375	0.8	13	13	250	60	60
	400	0.8	13	13	200	60	60
	425	0.8	13	13	150	60	60
475	275	0.8	13	10	500	60	60
	300	0.8	13	10	450	60	60
	325	0.8	13	13	400	60	60
	350	0.8	13	13	350	60	60
	375	0.8	13	13	300	60	60
	400	0.8	13	13	250	60	60
	425	0.8	13	13	200	60	60
	450	0.8	13	13	150	60	60
500	300	0.8	13	10	500	60	60
	325	0.8	13	13	450	60	60
	350	0.8	13	13	400	60	60
	375	0.8	13	13	350	60	60
	400	0.8	13	13	300	60	60
	425	0.8	13	13	250	60	60
	450	0.8	13	13	200	60	60
	475	0.8	13	13	150	60	60

単位：mm

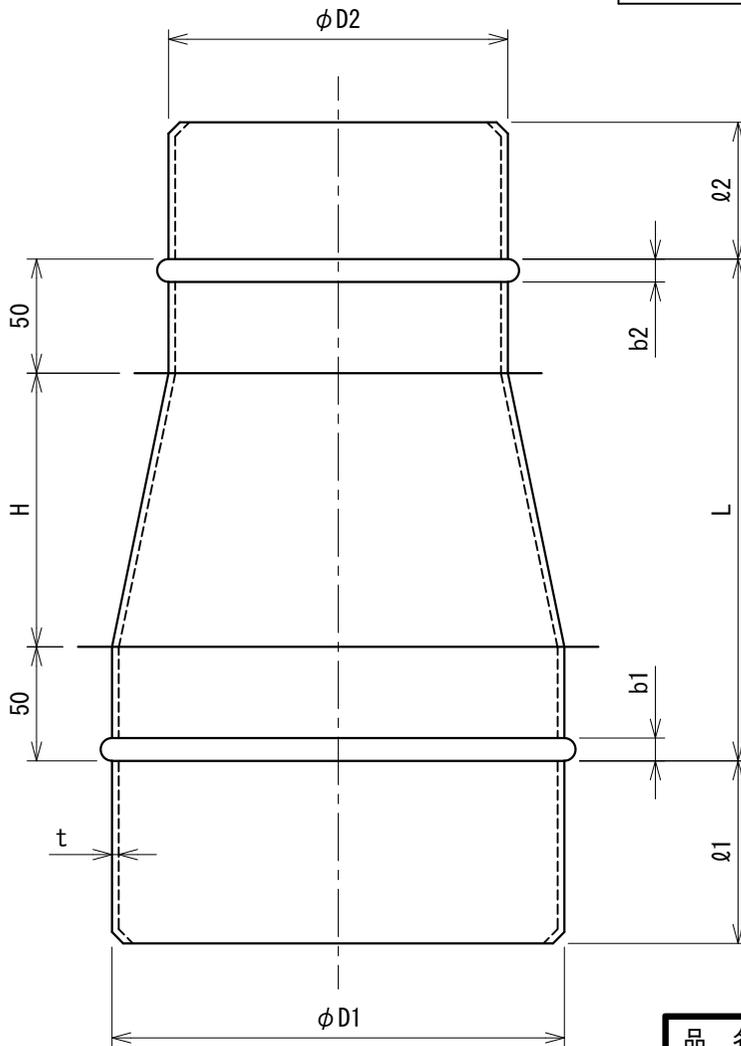

呼び径 D	外径公差	長さ公差 (b, L, ℓ)
φ75~φ700	-1.2~-1.9	0~+1
φ750~φ1000	-2.0~-2.2	0~+1


品名	R管 (レジュースー)			
型式	R_FK_ENB_φ425~φ500			
材質	溶融亜鉛めっき鋼板・SGCC Z18 JIS3302 (塩ビ塗装)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 2. 27
			更新日附	

③		
②		
①	.	.
記号	年月日	備考

株式会社フカガワ

呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
550	300	0.8	13	10	600	60	60
	325	0.8	13	13	550	60	60
	350	0.8	13	13	500	60	60
	375	0.8	13	13	450	60	60
	400	0.8	13	13	400	60	60
	450	0.8	13	13	300	60	60
600	300	0.8	13	10	700	60	60
	350	0.8	13	13	600	60	60
	400	0.8	13	13	500	60	60
	450	0.8	13	13	400	60	60
	500	0.8	13	13	300	60	60
	550	0.8	13	13	200	60	60
650	350	0.8	13	13	700	60	60
	400	0.8	13	13	600	60	60
	450	0.8	13	13	500	60	60
	500	0.8	13	13	400	60	60
	550	0.8	13	13	300	60	60
	600	0.8	13	13	200	60	60
700	350	0.8	13	13	800	60	60
	400	0.8	13	13	700	60	60
	450	0.8	13	13	600	60	60
	500	0.8	13	13	500	60	60
	550	0.8	13	13	400	60	60
	600	0.8	13	13	300	60	60
650	0.8	13	13	200	60	60	

単位：mm

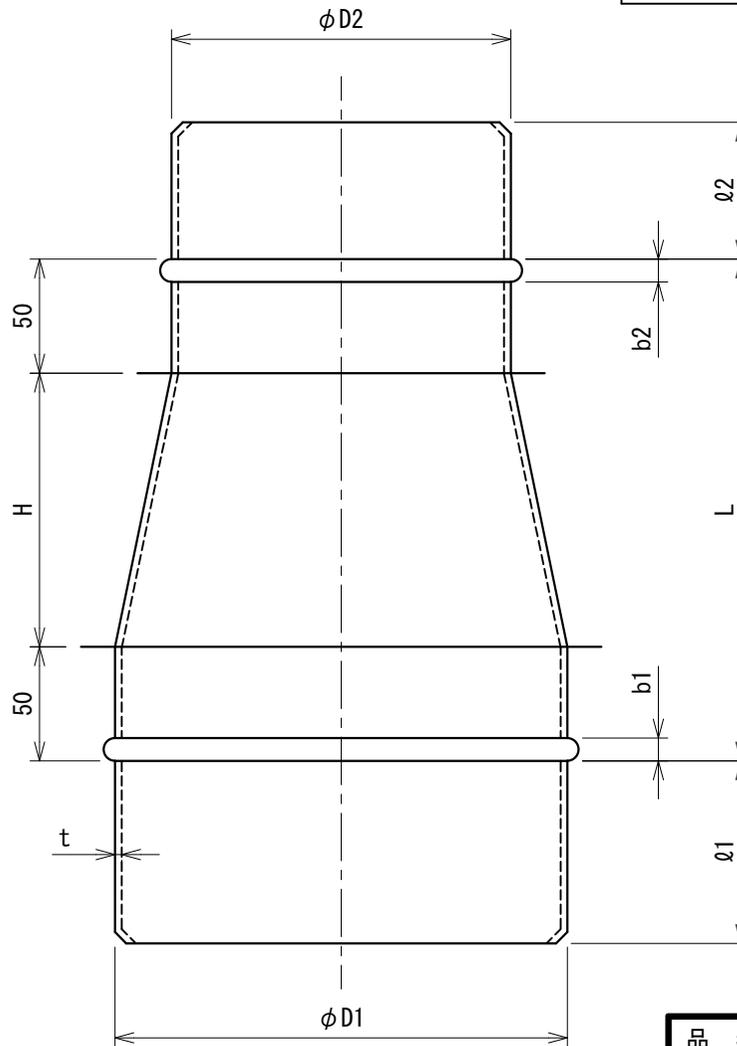

呼び径 D	外径公差	長さ公差 (b、L、ℓ)
φ75~φ700	-1.2~-1.9	0~+1
φ750~φ1000	-2.0~-2.2	0~+1


品名	R管 (レジュースー)			
型式	R_FK_ENB_φ550~φ700			
材質	熔融亜鉛めっき鋼板・SGCC Z18 JIS3302 (塩ビ塗装)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 2. 27
			更新日附	

③		
②		
①	.	.
記号	年月日	備考

株式会社フカガワ

呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
750	400	1.0	13	13	800	60	60
	450	1.0	13	13	700	60	60
	500	1.0	13	13	600	60	60
	550	1.0	13	13	500	60	60
	600	1.0	13	13	400	60	60
	650	1.0	13	13	300	60	60
	700	1.0	13	13	200	60	60
800	450	1.0	13	13	800	60	60
	500	1.0	13	13	700	60	60
	550	1.0	13	13	600	60	60
	600	1.0	13	13	500	60	60
	650	1.0	13	13	400	60	60
	700	1.0	13	13	300	60	60
	750	1.0	13	13	200	60	60
900	550	1.0	13	13	800	60	60
	600	1.0	13	13	700	60	60
	650	1.0	13	13	600	60	60
	700	1.0	13	13	500	60	60
	750	1.0	13	13	400	60	60
	800	1.0	13	13	300	60	60
1000	650	1.0	13	13	800	60	60
	700	1.0	13	13	700	60	60
	750	1.0	13	13	600	60	60
	800	1.0	13	13	500	60	60
	900	1.0	13	13	300	60	60

単位：mm

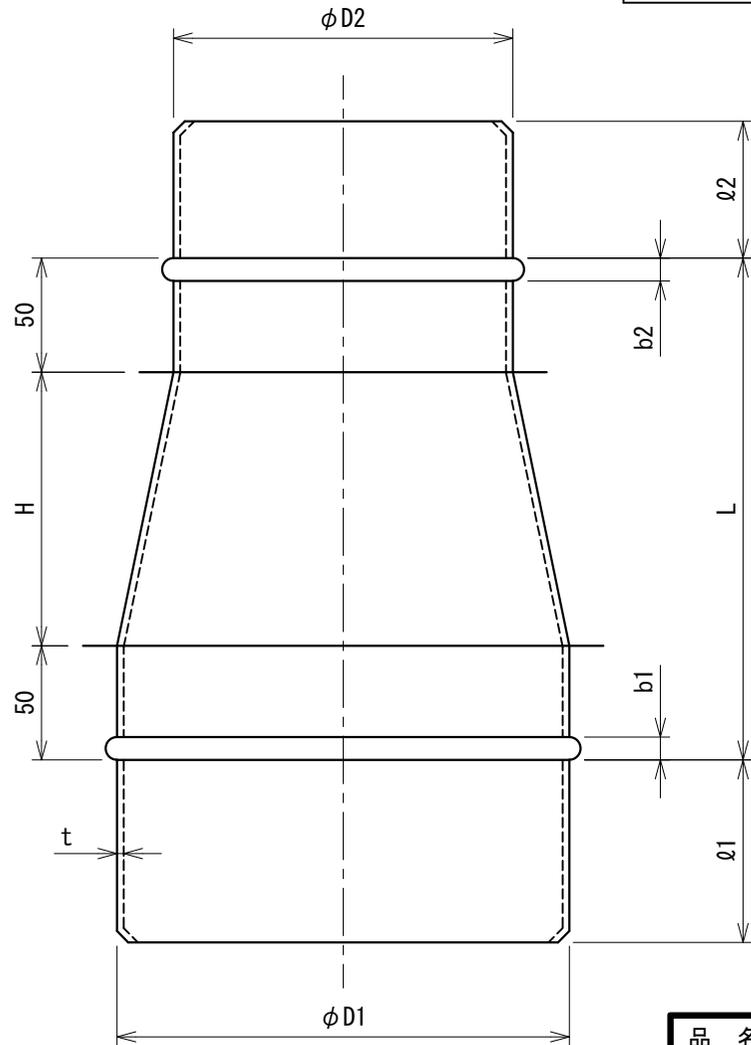

呼び径 D	外径公差	長さ公差 (b, L, ℓ)
φ75~φ700	-1.2~-1.9	0~+1
φ750~φ1000	-2.0~-2.2	0~+1

品名	R管 (レジューサー)			
型式	R_FK_ENB_φ750~φ1000			
材質	熔融亜鉛めっき鋼板・SGCC Z18 JIS3302 (塩ビ塗装)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 2. 27
			更新日附	

③		
②		
①	.	.
記号	年月日	備考

株式会社フカガワ