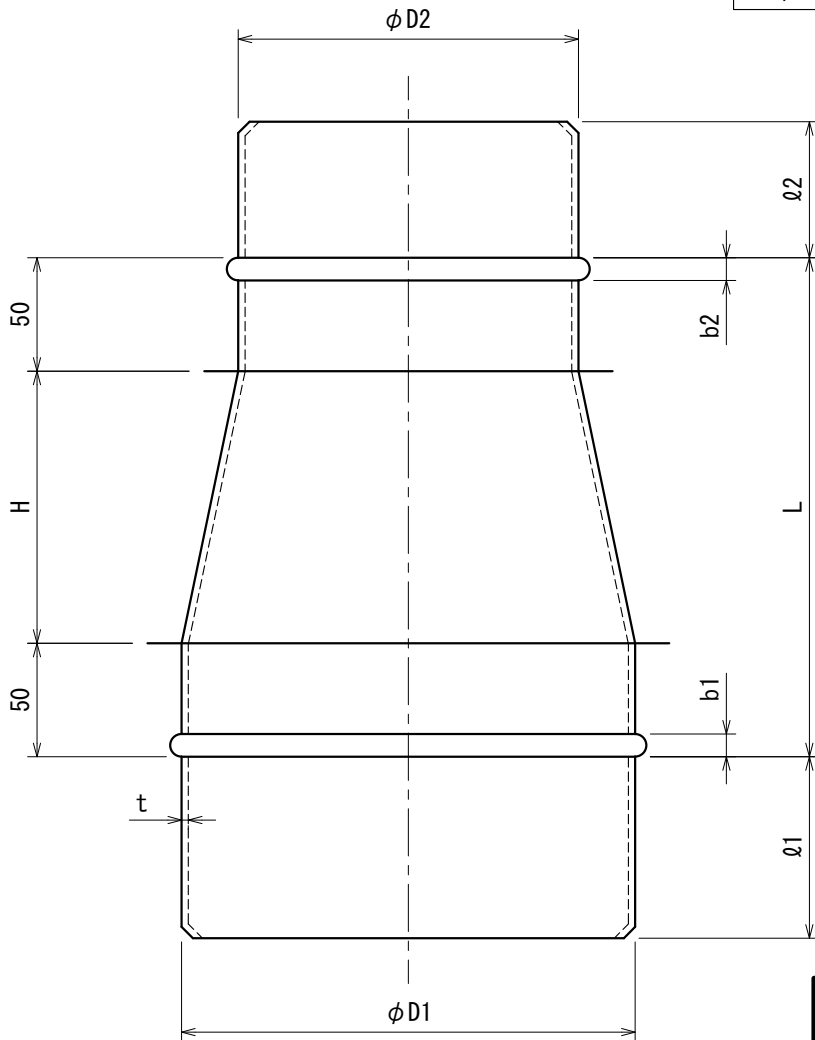


呼び径		板厚	b1	b2	L	ℓ1	ℓ2	呼び径 D			外径公差	長さ公差 (b、L、ℓ)	
D1	D2	t						φ 75～φ 700	-1.2～-1.9	0～+1			
100	75	0.6	10	10	150	60	60	φ 750～φ 1000	-2.0～-2.2	0～+1			
125	75	0.6	10	10	200	60	60						
	100	0.6	10	10	150	60	60						
150	75	0.6	10	10	250	60	60						
	100	0.6	10	10	200	60	60						
	125	0.6	10	10	150	60	60						
175	75	0.6	10	10	300	60	60						
	100	0.6	10	10	250	60	60						
	125	0.6	10	10	200	60	60						
	150	0.6	10	10	150	60	60						
200	75	0.6	10	10	350	60	60						
	100	0.6	10	10	300	60	60						
	125	0.6	10	10	250	60	60						
	150	0.6	10	10	200	60	60						
	175	0.6	10	10	150	60	60						
225	75	0.6	10	10	400	60	60						
	100	0.6	10	10	350	60	60						
	125	0.6	10	10	300	60	60						
	150	0.6	10	10	250	60	60						
	175	0.6	10	10	200	60	60						
	200	0.6	10	10	150	60	60						
250	100	0.6	10	10	400	60	60						
	125	0.6	10	10	350	60	60						
	150	0.6	10	10	300	60	60						
	175	0.6	10	10	250	60	60						
	200	0.6	10	10	200	60	60						
	225	0.6	10	10	150	60	60						
275	100	0.6	10	10	450	60	60						
	125	0.6	10	10	400	60	60						
	150	0.6	10	10	350	60	60						
	175	0.6	10	10	300	60	60						
	200	0.6	10	10	250	60	60						
	225	0.6	10	10	200	60	60						
300	250	0.6	10	10	150	60	60						
	100	0.6	10	10	500	60	60						
	125	0.6	10	10	450	60	60						
	150	0.6	10	10	400	60	60						
	175	0.6	10	10	350	60	60						
	200	0.6	10	10	300	60	60						
	225	0.6	10	10	250	60	60						
	250	0.6	10	10	200	60	60						
	275	0.6	10	10	150	60	60						

分 類	継手			
品 名	R 管（レジャーサー）			
図 番	R_FK_SDM_φ100～φ300			
材 質	高耐食めっき鋼板スーパーダイマ® SGMCC (JIS G 3323)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 6
			更新日附	


株 式 会 社 フ カ ガ ワ				
-----------------	--	--	--	--

記 号	年 月 日	備 考
△3		
△2		
△1		

単位：mm

呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
475	275	0.8	13	10	500	60	60
	300	0.8	13	10	450	60	60
	325	0.8	13	13	400	60	60
	350	0.8	13	13	350	60	60
	375	0.8	13	13	300	60	60
	400	0.8	13	13	250	60	60
	425	0.8	13	13	200	60	60
	450	0.8	13	13	150	60	60
500	300	0.8	13	10	500	60	60
	325	0.8	13	13	450	60	60
	350	0.8	13	13	400	60	60
	375	0.8	13	13	350	60	60
	400	0.8	13	13	300	60	60
	425	0.8	13	13	250	60	60
	450	0.8	13	13	200	60	60
	475	0.8	13	13	150	60	60
550	300	0.8	13	10	600	60	60
	325	0.8	13	13	550	60	60
	350	0.8	13	13	500	60	60
	375	0.8	13	13	450	60	60
	400	0.8	13	13	400	60	60
	450	0.8	13	13	300	60	60
	500	0.8	13	13	200	60	60
	550	0.8	13	13	200	60	60
600	300	0.8	13	10	700	60	60
	350	0.8	13	13	600	60	60
	400	0.8	13	13	500	60	60
	450	0.8	13	13	400	60	60
	500	0.8	13	13	300	60	60
	550	0.8	13	13	200	60	60
	600	0.8	13	13	200	60	60
	650	0.8	13	13	200	60	60
650	350	0.8	13	13	700	60	60
	400	0.8	13	13	600	60	60
	450	0.8	13	13	500	60	60
	500	0.8	13	13	400	60	60
	550	0.8	13	13	300	60	60
	600	0.8	13	13	200	60	60
	650	0.8	13	13	200	60	60
	700	0.8	13	13	200	60	60
700	350	0.8	13	13	800	60	60
	400	0.8	13	13	700	60	60
	450	0.8	13	13	600	60	60
	500	0.8	13	13	500	60	60
	550	0.8	13	13	400	60	60
	600	0.8	13	13	300	60	60
	650	0.8	13	13	200	60	60
	700	0.8	13	13	200	60	60

単位：mm

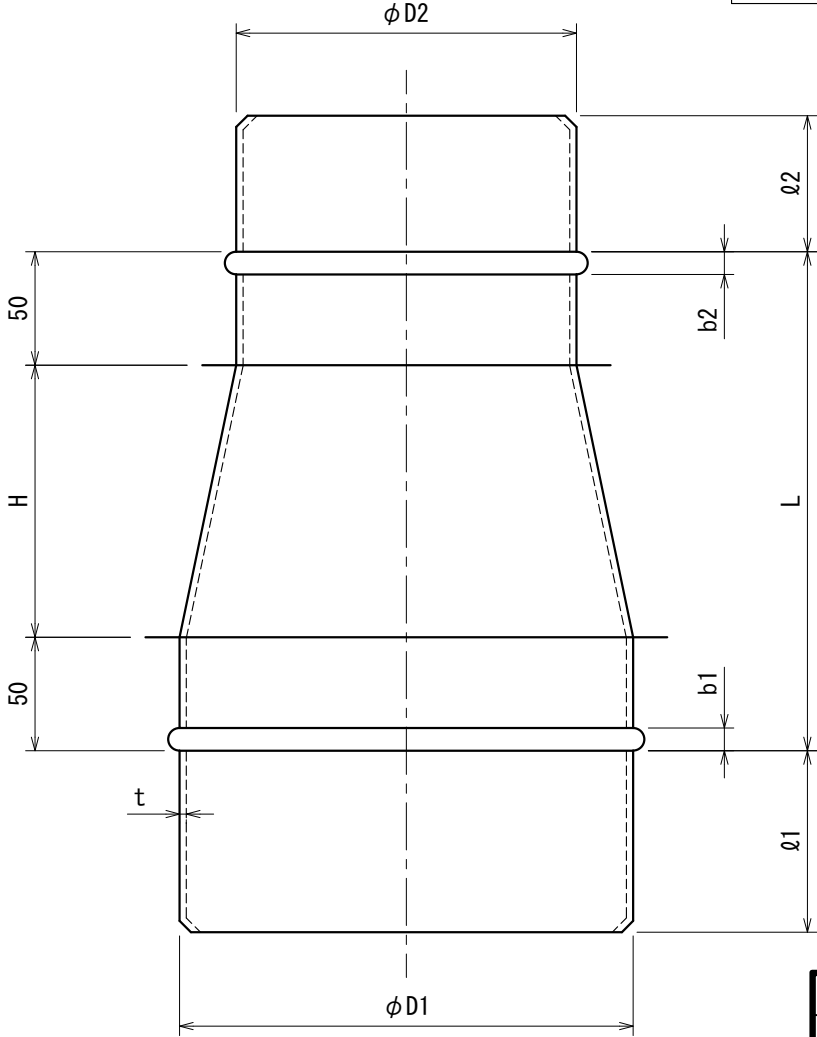

呼び径 D	外径公差	長さ公差 (b,L,ℓ)
φ 75～φ 700	-1.2～-1.9	0～+1
φ 750～φ 1000	-2.0～-2.2	0～+1


分 類	継手			
品 名	R 管（レジューサー）			
図 番	R_FK_SDM_φ 475～φ 700			
材 質	高耐食めっき鋼板スーパーダイマ® SGMCC (JIS G 3323)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026.7.6
			更新日附	

△3		
△2		
△1		
記 号	年 月 日	備 考

株 式 会 社 フ カ ガ ワ

呼び径		板厚	b1	b2	L	ø1	ø2
D1	D2	t					
750	400	1.0	13	13	800	60	60
	450	1.0	13	13	700	60	60
	500	1.0	13	13	600	60	60
	550	1.0	13	13	500	60	60
	600	1.0	13	13	400	60	60
	650	1.0	13	13	300	60	60
	700	1.0	13	13	200	60	60
800	450	1.0	13	13	800	60	60
	500	1.0	13	13	700	60	60
	550	1.0	13	13	600	60	60
	600	1.0	13	13	500	60	60
	650	1.0	13	13	400	60	60
	700	1.0	13	13	300	60	60
	750	1.0	13	13	200	60	60
900	550	1.0	13	13	800	60	60
	600	1.0	13	13	700	60	60
	650	1.0	13	13	600	60	60
	700	1.0	13	13	500	60	60
	750	1.0	13	13	400	60	60
	800	1.0	13	13	300	60	60
	900	1.0	13	13	200	60	60
1000	650	1.0	13	13	800	60	60
	700	1.0	13	13	700	60	60
	750	1.0	13	13	600	60	60
	800	1.0	13	13	500	60	60
	900	1.0	13	13	300	60	60

単位：mm

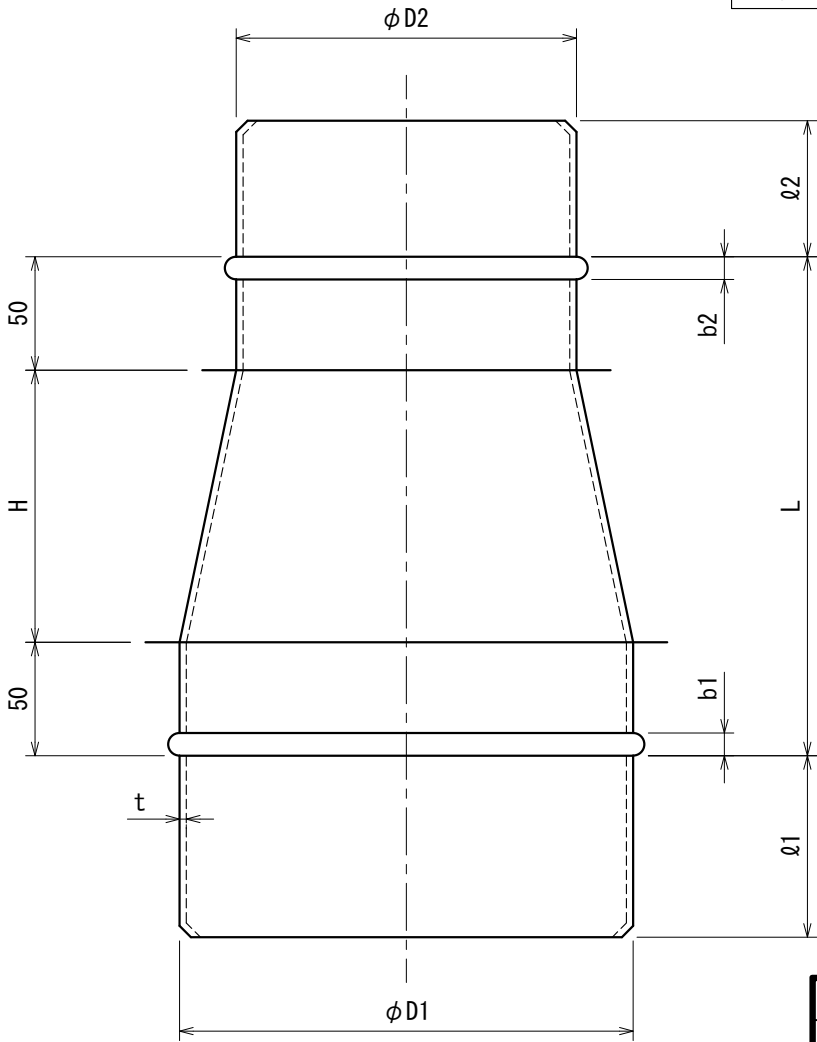


呼び径 D	外径公差	長さ公差 (b,L,ø)
φ 75～φ 700	-1.2～-1.9	0～+1
φ 750～φ 1000	-2.0～-2.2	0～+1

分 類	継手			
品 名	R 管（レジュースー）			
図 番	R_FK_SDM_φ 750～φ 1000			
材 質	高耐食めっき鋼板スーパーダイマ® SGMCC (JIS G 3323)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 6
			更新日附	

③		
②		
①		
記 号	年 月 日	備 考

株 式 会 社 フ カ ガ ワ

呼び径		板厚	b1	b2	L	ℓ1	ℓ2	呼び径 D			外径公差		長さ公差 (b、L、ℓ)	
D1	D2	t						φ 75～φ 700		-1.2～-1.9		0～+1		
100	75	0.6	10	10	150	60	60	φ 750～φ 1000		-2.0～-2.2		0～+1		
125	75	0.6	10	10	200	60	60							
	100	0.6	10	10	150	60	60							
150	75	0.6	10	10	250	60	60							
	100	0.6	10	10	200	60	60							
	125	0.6	10	10	150	60	60							
175	75	0.6	10	10	300	60	60							
	100	0.6	10	10	250	60	60							
	125	0.6	10	10	200	60	60							
	150	0.6	10	10	150	60	60							
200	75	0.6	10	10	350	60	60							
	100	0.6	10	10	300	60	60							
	125	0.6	10	10	250	60	60							
	150	0.6	10	10	200	60	60							
	175	0.6	10	10	150	60	60							
225	75	0.6	10	10	400	60	60							
	100	0.6	10	10	350	60	60							
	125	0.6	10	10	300	60	60							
	150	0.6	10	10	250	60	60							
	175	0.6	10	10	200	60	60							
	200	0.6	10	10	150	60	60							
250	100	0.6	10	10	400	60	60							
	125	0.6	10	10	350	60	60							
	150	0.6	10	10	300	60	60							
	175	0.6	10	10	250	60	60							
	200	0.6	10	10	200	60	60							
	225	0.6	10	10	150	60	60							
275	100	0.6	10	10	450	60	60							
	125	0.6	10	10	400	60	60							
	150	0.6	10	10	350	60	60							
	175	0.6	10	10	300	60	60							
	200	0.6	10	10	250	60	60							
	225	0.6	10	10	200	60	60							
300	100	0.6	10	10	500	60	60							
	125	0.6	10	10	450	60	60							
	150	0.6	10	10	400	60	60							
	175	0.6	10	10	350	60	60							
	200	0.6	10	10	300	60	60							
	225	0.6	10	10	250	60	60							
300	250	0.6	10	10	200	60	60							
	275	0.6	10	10	150	60	60							

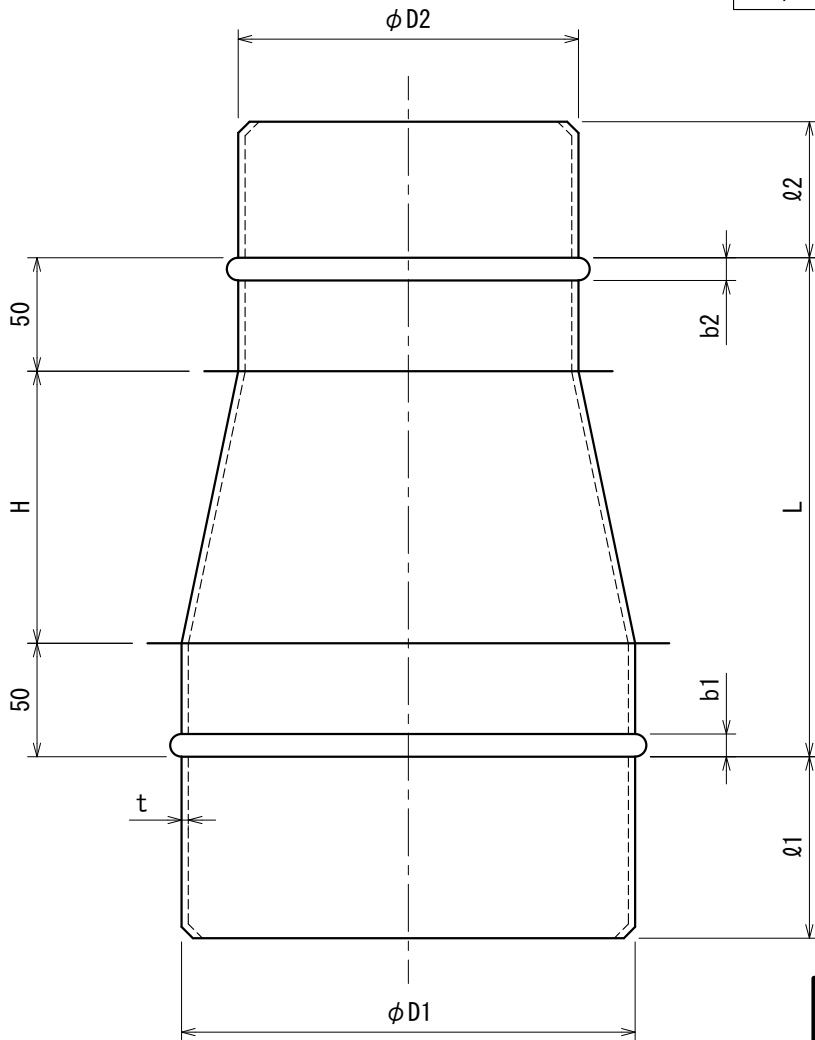


分 類	継手			
品 名	R 管（レジューサー）			
図 番	R_FK_ZAM_φ100～φ300			
材 質	黒ZAM® MSM-CC-DZBK 90B K25080			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 6
			更新日附	
株 式 会 社 フ カ ガ ワ				

記 号	年 月 日	備 考
△3		
△2		
△1		

単位：mm

呼び径		板厚	b1	b2	L	ℓ1	ℓ2
D1	D2	t					
475	275	0.8	13	10	500	60	60
	300	0.8	13	10	450	60	60
	325	0.8	13	13	400	60	60
	350	0.8	13	13	350	60	60
	375	0.8	13	13	300	60	60
	400	0.8	13	13	250	60	60
	425	0.8	13	13	200	60	60
	450	0.8	13	13	150	60	60
500	300	0.8	13	10	500	60	60
	325	0.8	13	13	450	60	60
	350	0.8	13	13	400	60	60
	375	0.8	13	13	350	60	60
	400	0.8	13	13	300	60	60
	425	0.8	13	13	250	60	60
	450	0.8	13	13	200	60	60
	475	0.8	13	13	150	60	60
550	300	0.8	13	10	600	60	60
	325	0.8	13	13	550	60	60
	350	0.8	13	13	500	60	60
	375	0.8	13	13	450	60	60
	400	0.8	13	13	400	60	60
	450	0.8	13	13	300	60	60
	500	0.8	13	13	200	60	60
	550	0.8	13	13	200	60	60
600	300	0.8	13	10	700	60	60
	350	0.8	13	13	600	60	60
	400	0.8	13	13	500	60	60
	450	0.8	13	13	400	60	60
	500	0.8	13	13	300	60	60
	550	0.8	13	13	200	60	60
	600	0.8	13	13	200	60	60
	650	0.8	13	13	200	60	60
650	350	0.8	13	13	700	60	60
	400	0.8	13	13	600	60	60
	450	0.8	13	13	500	60	60
	500	0.8	13	13	400	60	60
	550	0.8	13	13	300	60	60
	600	0.8	13	13	200	60	60
	650	0.8	13	13	200	60	60
	700	0.8	13	13	200	60	60
700	350	0.8	13	13	800	60	60
	400	0.8	13	13	700	60	60
	450	0.8	13	13	600	60	60
	500	0.8	13	13	500	60	60
	550	0.8	13	13	400	60	60
	600	0.8	13	13	300	60	60
	650	0.8	13	13	200	60	60
	700	0.8	13	13	200	60	60

単位：mm

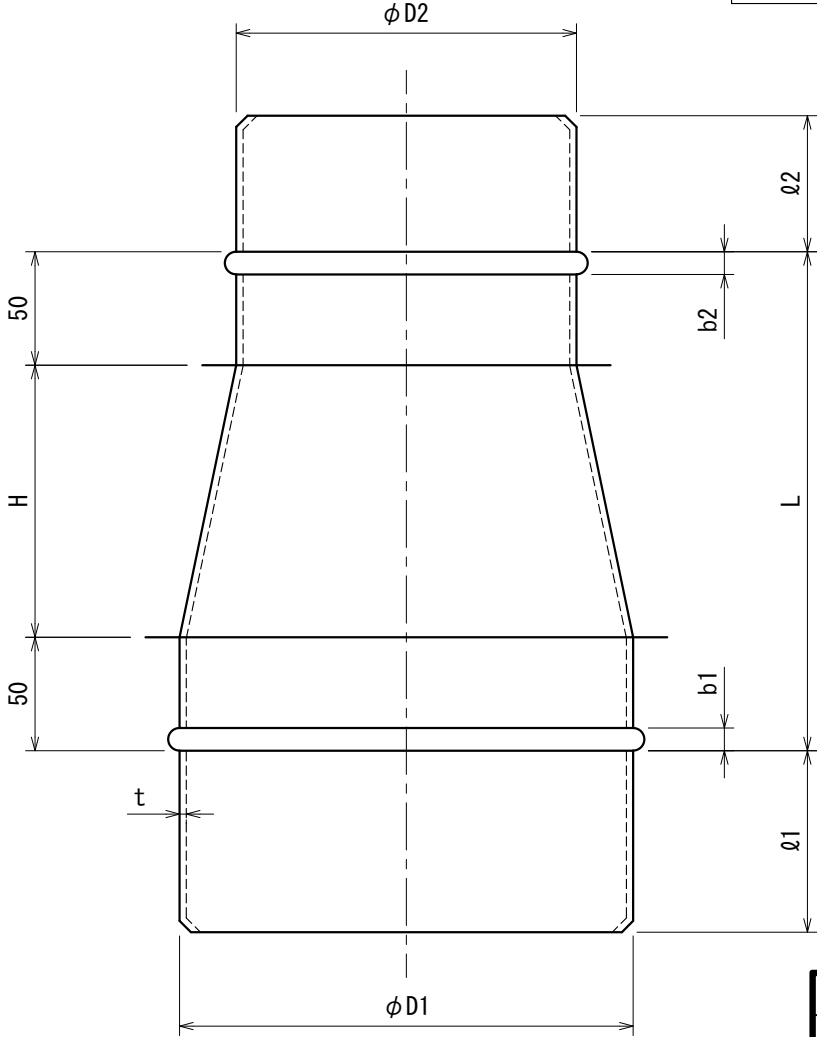

呼び径 D	外径公差	長さ公差 (b,L,ℓ)
φ 75～φ 700	-1.2～-1.9	0～+1
φ 750～φ 1000	-2.0～-2.2	0～+1

分 類	継手			
品 名	R 管（レジューサー）			
図 番	R_FK_ZAM_φ 475～φ 700			
材 質	黒ZAM® MSM-CC-DZBK 90B K25080			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 6
			更新日附	

△3		
△2		
△1		
記 号	年 月 日	備 考

株 式 会 社 フ カ ガ ワ