


呼び径		板厚	L	L1	L2	L3
D1	D3	t				
75	75	0.6	220	72.5	147.5	140
100	75	0.6	220	60.0	160.0	160
	100	0.6	260	80.0	180.0	170
125	75	0.6	220	47.5	172.5	180
	100	0.6	260	67.5	192.5	190
150	125	0.6	300	87.5	212.5	205
	75	0.6	220	35.0	185.0	195
	100	0.6	260	55.0	205.0	210
	125	0.6	300	75.0	225.0	220
175	150	0.6	340	95.0	245.0	235
	75	0.6	220	22.5	197.5	215
	100	0.6	260	42.5	217.5	225
	125	0.6	300	62.5	237.5	240
200	150	0.6	340	82.5	257.5	250
	175	0.6	380	102.5	277.5	265
	100	0.6	260	30.0	230.0	245
	125	0.6	300	50.0	250.0	255
225	150	0.6	340	70.0	270.0	270
	175	0.6	380	90.0	290.0	280
	200	0.6	420	110.0	310.0	295
	225	0.6	460	130.0	330.0	310
250	225	0.6	460	117.5	342.5	325
	100	0.6	260	17.5	242.5	260
	125	0.6	300	37.5	262.5	275
	150	0.6	340	57.5	282.5	285
275	175	0.6	380	77.5	302.5	300
	200	0.6	420	97.5	322.5	310
	225	0.6	460	117.5	342.5	325
	250	0.6	500	137.5	362.5	340
300	275	0.6	540	157.5	382.5	355
	100	0.6	260	-7.5	267.5	295
	125	0.6	300	12.5	287.5	310
	150	0.6	340	32.5	307.5	320
325	175	0.6	380	52.5	327.5	335
	200	0.6	420	72.5	347.5	345
	225	0.6	460	92.5	367.5	360
	250	0.6	500	112.5	387.5	370
350	275	0.6	540	132.5	407.5	385

呼び径		板厚	L	L1	L2	L3
D1	D3	t				
300	100	0.6	260	-20.0	280.0	315
	125	0.6	300	0	300.0	325
	150	0.6	340	20.0	320.0	340
	175	0.6	380	40.0	340.0	350
	200	0.6	420	60.0	360.0	365
	225	0.6	460	80.0	380.0	375
	250	0.6	500	100.0	400.0	390
	275	0.6	540	120.0	420.0	400
350	300	0.6	580	140.0	440.0	415

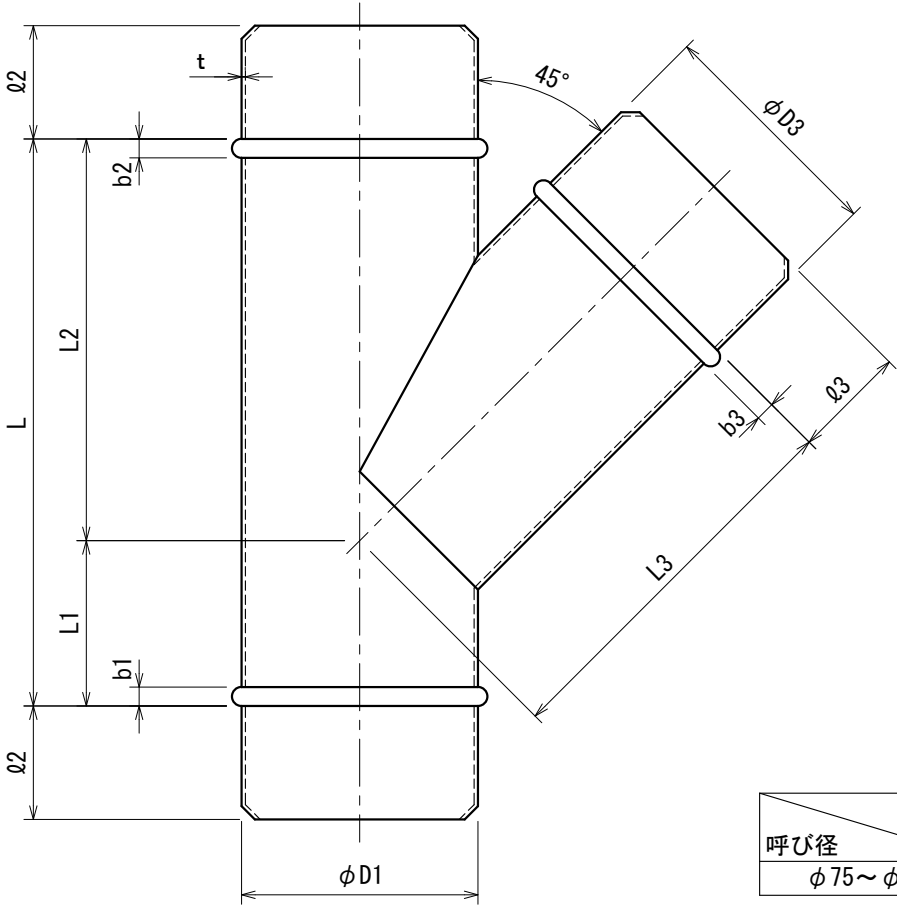

$$L=1.6 \times D3+100$$

$$L1=0.8 \times D3+50-0.5 \times D1$$

$$L2=0.8 \times D3+50+0.5 \times D1$$

$$L3 \div 0.5 \times D3+50+0.71 \times D1$$

呼び径	区分	呼び径 D1・D3	
		φ1・φ2・φ3	b1・b2・b3
φ 75～φ 300		60	10


分 類	継手			
品 名	Y 管（ト管）			
図 番	Y_FK_SDM_φ 75～φ 300			
材 質	高耐食めつき鋼板スーパーダイマ® SGMCC (JIS G 3323)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 30
			更新日附	
株 式 会 社 フ カ ガ ワ				

△		
△		
△		
記 号	年 月 日	備 考

呼び径		板厚	L	L1	L2	L3
D1	D3	t				
325	200	0.8	420	47.5	372.5	380
	225	0.8	460	67.5	392.5	395
	250	0.8	500	87.5	412.5	405
	275	0.8	540	107.5	432.5	420
	300	0.8	580	127.5	452.5	430
	325	0.8	620	147.5	472.5	445
350	200	0.8	420	35.0	385.0	400
	225	0.8	460	55.0	405.0	415
	250	0.8	500	75.0	425.0	425
	275	0.8	540	95.0	445.0	440
	300	0.8	580	115.0	465.0	450
	325	0.8	620	135.0	485.0	465
375	200	0.8	420	35.0	385.0	400
	225	0.8	460	55.0	405.0	415
	250	0.8	500	75.0	425.0	425
	275	0.8	540	95.0	445.0	440
	300	0.8	580	115.0	465.0	450
	325	0.8	620	135.0	485.0	465
400	250	0.8	500	62.5	437.5	445
	275	0.8	540	82.5	457.5	455
	300	0.8	580	102.5	477.5	470
	325	0.8	620	122.5	497.5	480
	350	0.8	660	142.5	517.5	495
	375	0.8	700	162.5	537.5	505
450	300	0.8	580	90.0	490.0	485
	325	0.8	620	110.0	510.0	500
	350	0.8	660	130.0	530.0	510
	375	0.8	700	150.0	550.0	525
	400	0.8	740	170.0	570.0	535
	425	0.8	780	190.0	590.0	545
500	325	0.8	620	85.0	535.0	535
	350	0.8	660	105.0	555.0	545
	375	0.8	700	125.0	575.0	560
	400	0.8	740	145.0	595.0	570
	425	0.8	780	165.0	615.0	580
	450	0.8	820	185.0	635.0	595
550	300	0.8	580	40.0	540.0	555
	325	0.8	620	60.0	560.0	570
	350	0.8	660	80.0	580.0	580
	375	0.8	700	100.0	600.0	595
	400	0.8	740	120.0	620.0	605
	425	0.8	780	140.0	640.0	620
600	350	0.8	660	105.0	555.0	545
	375	0.8	700	125.0	575.0	560
	400	0.8	740	145.0	595.0	570
	425	0.8	780	165.0	615.0	580
	450	0.8	820	185.0	635.0	595
	475	0.8	860	205.0	655.0	610
650	375	0.8	700	100.0	600.0	595
	400	0.8	740	120.0	620.0	605
	425	0.8	780	140.0	640.0	620
	450	0.8	820	160.0	660.0	630
	475	0.8	860	180.0	680.0	645
	500	0.8	900	200.0	700.0	655
700	400	0.8	740	120.0	620.0	605
	425	0.8	780	140.0	640.0	620
	450	0.8	820	160.0	660.0	630
	475	0.8	860	180.0	680.0	645
	500	0.8	900	200.0	700.0	655
	525	0.8	940	220.0	720.0	670
750	425	0.8	780	140.0	640.0	620
	450	0.8	820	160.0	660.0	630
	475	0.8	860	180.0	680.0	645
	500	0.8	900	200.0	700.0	655
	525	0.8	940	220.0	720.0	670
	550	0.8	980	240.0	740.0	685
800	450	0.8	820	160.0	660.0	630
	475	0.8	860	180.0	680.0	645
	500	0.8	900	200.0	700.0	655
	525	0.8	940	220.0	720.0	670
	550	0.8	980	240.0	740.0	685
	575	0.8	1020	260.0	760.0	700

単位 : mm

呼び径		板厚	L	L1	L2	L3
D1	D3	t				
550	550	0.8	980	215.0	765.0	715
	400	0.8	740	70.0	670.0	680
	450	0.8	820	110.0	710.0	705
600	500	0.8	900	150.0	750.0	730
	550	0.8	980	190.0	790.0	755
	600	0.8	1060	230.0	830.0	780
650	450	0.8	820	85.0	735.0	740
	500	0.8	900	125.0	775.0	765
	550	0.8	980	165.0	815.0	790
700	500	0.8	900	100.0	800.0	800
	550	0.8	980	140.0	840.0	825
	600	0.8	1060	180.0	880.0	850
750	550	1.0	980	115.0	865.0	860
	600	1.0	1060	155.0	905.0	885
	650	1.0	1140	195.0	945.0	910
800	600	1.0	1060	130.0	930.0	920
	650	1.0	1140	170.0	970.0	945
	700	1.0	1220	210.0	1010.0	970

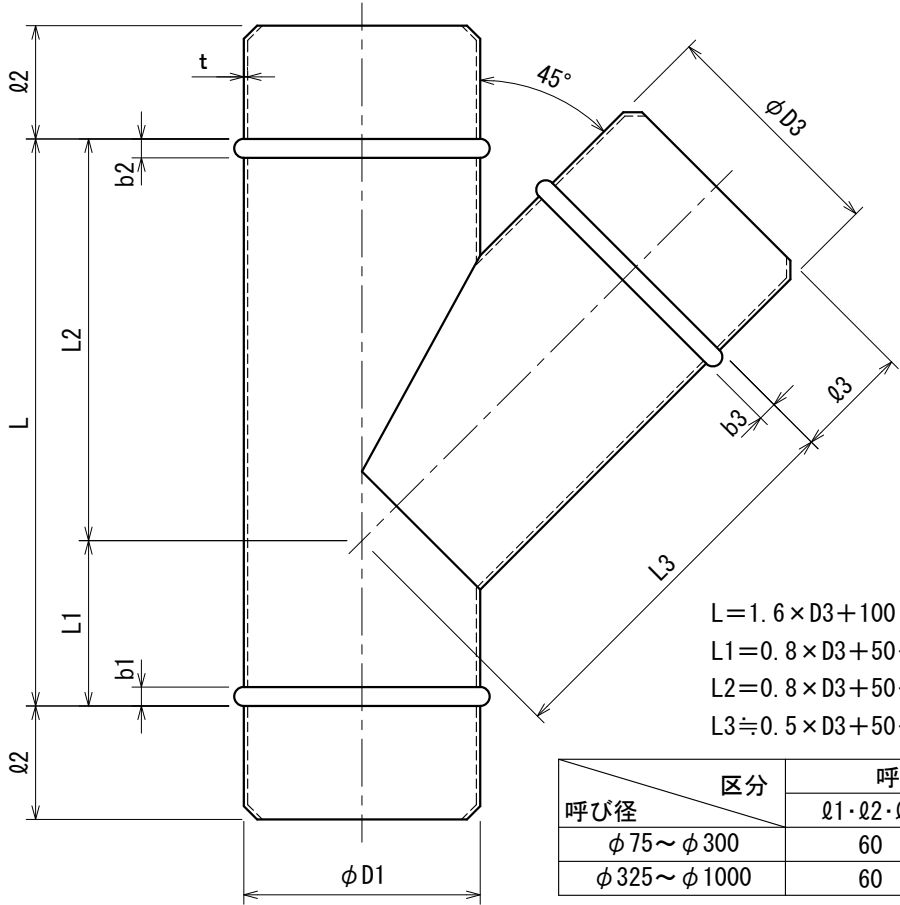


呼び径	区分	
	呼び径 D1・D3	Q1・Q2・Q3
φ 75～φ 300	60	10
φ 325～φ 1000	60	13

分 類	継手			
品 名	Y 管（ト管）			
図 番	Y_FK_SDM_φ325～φ800			
材 質	高耐食めつき鋼板スーパーダイマ® SGMCC (JIS G 3323)			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 30
			更新日附	
株 式 会 社 フ カ ガ ワ				

記 号	年 月 日	備 考
△		
△		
△		

呼び径		板厚	L	L1	L2	L3
D1	D3	t				
325	200	0.8	420	47.5	372.5	380
	225	0.8	460	67.5	392.5	395
	250	0.8	500	87.5	412.5	405
	275	0.8	540	107.5	432.5	420
	300	0.8	580	127.5	452.5	430
	325	0.8	620	147.5	472.5	445
350	200	0.8	420	35.0	385.0	400
	225	0.8	460	55.0	405.0	415
	250	0.8	500	75.0	425.0	425
	275	0.8	540	95.0	445.0	440
	300	0.8	580	115.0	465.0	450
	325	0.8	620	135.0	485.0	465
375	250	0.8	500	62.5	437.5	445
	275	0.8	540	82.5	457.5	455
	300	0.8	580	102.5	477.5	470
	325	0.8	620	122.5	497.5	480
	350	0.8	660	142.5	517.5	495
	375	0.8	700	162.5	537.5	505
400	300	0.8	580	90.0	490.0	485
	325	0.8	620	110.0	510.0	500
	350	0.8	660	130.0	530.0	510
	375	0.8	700	150.0	550.0	525
	400	0.8	740	170.0	570.0	535
450	325	0.8	620	85.0	535.0	535
	350	0.8	660	105.0	555.0	545
	375	0.8	700	125.0	575.0	560
	400	0.8	740	145.0	595.0	570
	450	0.8	820	185.0	635.0	595
500	300	0.8	580	40.0	540.0	555
	325	0.8	620	60.0	560.0	570
	350	0.8	660	80.0	580.0	580
	375	0.8	700	100.0	600.0	595
	400	0.8	740	120.0	620.0	605
	450	0.8	820	160.0	660.0	630
	500	0.8	900	200.0	700.0	655
	550	0.8	980	240.0	740.0	680
550	350	0.8	660	55.5	605.0	615
	375	0.8	700	75.0	625.0	630
	400	0.8	740	95.0	645.0	640
	450	0.8	820	135.0	685.0	665
	500	0.8	900	175.0	725.0	690

呼び径		板厚	L	L1	L2	L3
D1	D3	t				
550	550	0.8	980	215.0	765.0	715
	400	0.8	740	70.0	670.0	680
	450	0.8	820	110.0	710.0	705
	500	0.8	900	150.0	750.0	730
600	550	0.8	980	190.0	790.0	755
	600	0.8	1060	230.0	830.0	780
	450	0.8	820	85.0	735.0	740
	500	0.8	900	125.0	775.0	765
650	550	0.8	980	165.0	815.0	790
	600	0.8	1060	205.0	855.0	815
	500	0.8	900	100.0	800.0	800
	550	0.8	980	140.0	840.0	825
700	600	0.8	1060	180.0	880.0	850

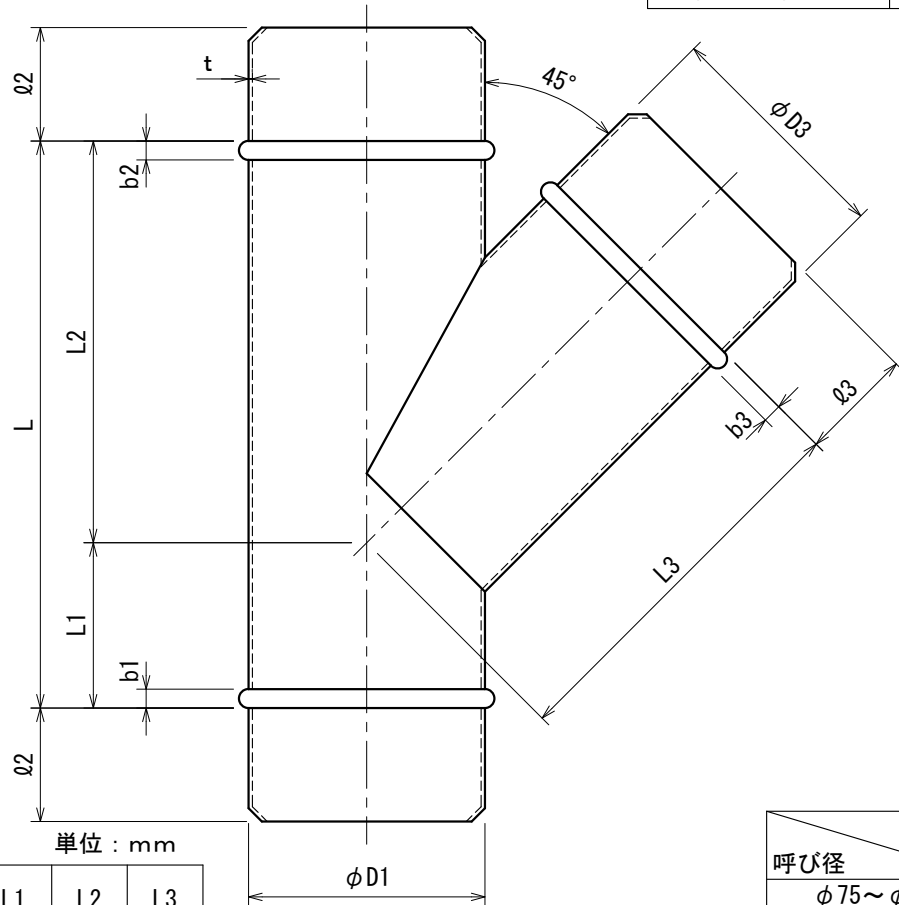

呼び径 D	外径公差	長さ公差 (b, L, l)
φ 75 ~ φ 700	-1.2 ~ -1.9	0 ~ +1
φ 750 ~ φ 1000	-2.0 ~ -2.2	0 ~ +1

呼び径	区分	呼び径 D1・D3	
		l1・l2・l3	b1・b2・b3
φ 75 ~ φ 300		60	10
φ 325 ~ φ 1000		60	13

分 類	継手			
品 名	Y 管 (ト管)			
図 番	Y_FK_ZAM_φ 325～φ 700			
材 質	黒ZAM® MSM-CC-DZBK 90B K25080			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 30
			更新日附	
株 式 会 社 フ カ ガ ワ				

記号	年月日	備考
△		
△		
△		

							呼び径 D		外径公差	長さ公差 (b、L、ℓ)
							φ 75～φ 700		-1.2～-1.9	0～+1
							φ 750～φ 1000		-2.0～-2.2	0～+1

呼び径		板厚	L	L1	L2	L3
D1	D3	t				
100	75	0.6	220	60.0	160.0	160
	100	0.6	260	80.0	180.0	170
125	75	0.6	220	47.5	172.5	180
	100	0.6	260	67.5	192.5	190
	125	0.6	300	87.5	212.5	205
150	75	0.6	220	35.0	185.0	195
	100	0.6	260	55.0	205.0	210
	125	0.6	300	75.0	225.0	220
	150	0.6	340	95.0	245.0	235
175	75	0.6	220	22.5	197.5	215
	100	0.6	260	42.5	217.5	225
	125	0.6	300	62.5	237.5	240
	150	0.6	340	82.5	257.5	250
	175	0.6	380	102.5	277.5	265
200	100	0.6	260	30.0	230.0	245
	125	0.6	300	50.0	250.0	255
	150	0.6	340	70.0	270.0	270
	175	0.6	380	90.0	290.0	280
	200	0.6	420	110.0	310.0	295
225	100	0.6	260	17.5	242.5	260
	125	0.6	300	37.5	262.5	275
	150	0.6	340	57.5	282.5	285
	175	0.6	380	77.5	302.5	300
	200	0.6	420	97.5	322.5	310
	225	0.6	460	117.5	342.5	325
250	100	0.6	260	5.0	255.0	280
	125	0.6	300	25.0	275.0	290
	150	0.6	340	45.0	295.0	305
	175	0.6	380	65.0	315.0	312
275	200	0.6	420	85.0	335.0	330
	225	0.6	460	105.0	355.0	340
	250	0.6	500	125.0	375.0	355
	100	0.6	260	-7.5	267.5	295
	125	0.6	300	12.5	287.5	310
300	150	0.6	340	32.5	307.5	320
	175	0.6	380	52.5	327.5	335
	200	0.6	420	72.5	347.5	345
	225	0.6	460	92.5	367.5	360
	250	0.6	500	112.5	387.5	370
	275	0.6	540	132.5	407.5	385
	300	0.6	580	140.0	440.0	415

呼び径		板厚	L	L1	L2	L3
D1	D3	t				
300	100	0.6	260	-20.0	280.0	315
	125	0.6	300	0	300.0	325
	150	0.6	340	20.0	320.0	340
	175	0.6	380	40.0	340.0	350
	200	0.6	420	60.0	360.0	365
	225	0.6	460	80.0	380.0	375
	250	0.6	500	100.0	400.0	390
	275	0.6	540	120.0	420.0	400
300	275	0.6	540	120.0	420.0	400
	300	0.6	580	140.0	440.0	415

△		
△		
△		
記号	年月日	備考

区分		呼び径 D1・D3	
呼び径		ℓ1・ℓ2・ℓ3	b1・b2・b3
φ 75～φ 300		60	10

分類	継手			
品名	Y管（ト管）			
図番	Y_FK_ZAM_φ 100～φ 300			
材質	黒ZAM® MSM-CC-DZBK 90B K25080			
承認	検図	製図	尺度	FREE
波	藤本	武田	作成日附	2026. 7. 30
			更新日附	
株式会社フカガワ				